


32X7 COMPACTED GALV ROTATION RESISTANT

32X7 constructions are available in either ordinary or lang's lay. Depending upon your requirement, different finishes and lubrications are available with plastic impregnation to achieve higher breaking loads or better wear characteristics.



Galvanised

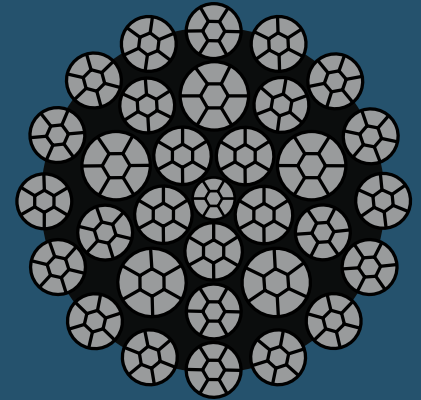

Pulley Suitable



Rotation Resist

Breaking Load Table

Nominal Diameter [mm]	Approximate Mass [kg/m]	Minimum breaking loads - 1770 Mpa	
		[kN]	[Kg]
14	0.97	169	17,233
16	1.25	219	22,338
18	1.60	282	28,764
19	1.80	315	32,130
20	1.96	344	35,088
22	2.35	412	42,024
24	2.79	488	49,762