


32X7 constructions are available in either ordinary or lang's lay. Depending upon your requirement, different finishes and lubrications are available with plastic impregnation to achieve higher breaking loads or better wear characteristics.



Galvanised

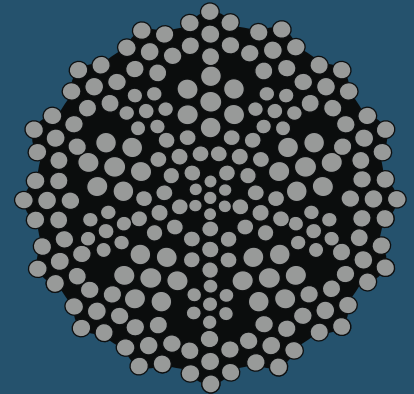

Pulley Suitable



Rotation Resist

Breaking Load Table

Nominal Diameter [mm]	Approximate Mass [kg/m]	Minimum breaking loads - 1960 Mpa	
		[kN]	[Kg]
8	0.291	45.16	4,606
9	0.60	105	10,710
10	0.71	123	12,546
11	0.84	146	14,892
12	0.97	169	17,238
13	1.10	193	19,686
14	1.25	219	22,338
15	1.61	282	28,764
16	1.80	315	32,130
18	1.97	344	35,088
19	2.36	412	42,024
20	1.816	282.24	28,788
22	2.197	341.51	34,834
24	2.615	406.43	41,455