


# 35X7 COMPACTED GALV ROTATION RESISTANT

35X7 constructions are available in either ordinary or lang's lay. Depending upon your requirement, different finishes and lubrications are available with plastic impregnation to achieve higher breaking loads or better wear characteristics.



Galvanised

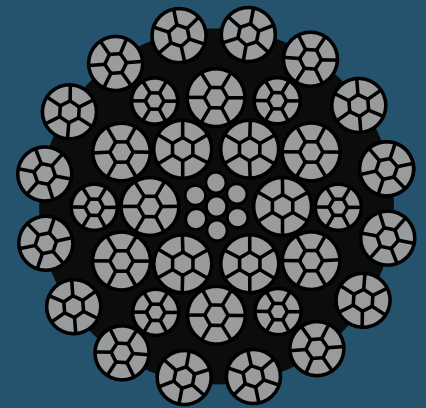

Pulley Suitable



Rotation Resist

## Breaking Load Table

Nominal Diameter [mm]	Approximate Mass [kg/m]	Minimum breaking loads - 1770 Mpa		Minimum breaking loads - 1960 Mpa	
		[kN]	[Kg]	[kN]	[Kg]
12	0.698	114.70	11,699	127.07	12,961
13	0.820	134.61	13,730	149.14	15,212
14	0.951	156.12	15,924	172.96	17,642
15	1.091	179.22	18,280	198.55	20,252
16	1.242	203.90	20,798	225.91	23,043
18	1.571	258.07	26,323	285.91	29,163
20	1.940	318.60	32,497	352.98	36,004
22	2.347	385.51	39,322	427.11	43,565
24	2.794	458.78	46,796	508.29	51,846
26	3.279	538.44	54,921	596.54	60,847
28	3.802	624.46	63,695	691.84	70,568
30	4.365	716.85	73,119	794.21	81,009