

FIBRE CORE - GALVANISED


4xK26WS - SCF is specifically engineered for use with the majority of pulling machines, with a synthetic fiber core and outer wires that are compacted to ensure smoother operation through a pulling machine and around pulleys.



Galvanised



Pulley Suitable

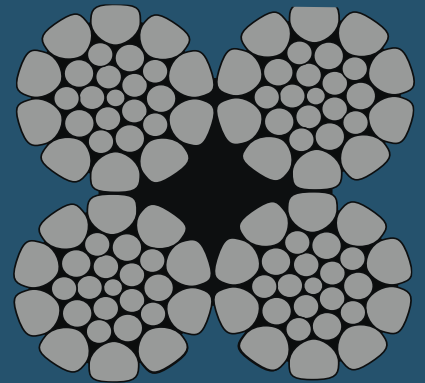

Breaking Load Table

Rope [Ømm]	Out. Wire [Ømm]	Minimum Breaking Force [kgf]	Length Mass [kg/m]
8.40	0.63	4.587	0.260
11.50	1.02	9.174	0.530
16.30*	1.05	17.329	1.040

*4 x K36WS - FC