


6xK26WS - IWRC is a unique construction of steel wire rope, designed for use with the majority of pulling machines and winches this construction has a independant wire rope core (IWRC) and is of a compacted design to ensure smother running through a pulling machine and around pullys. These properties also make it ideal as a heavier duty Zip Wire, suitable for commercial applications.



Galvanised

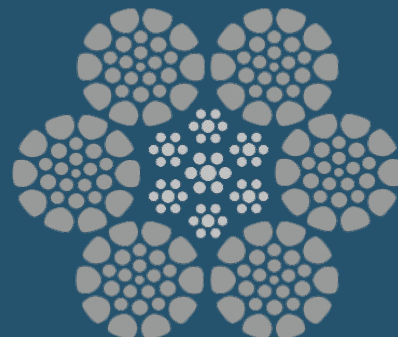

Pulley Suitable

Breaking Load Table

Rope [Ømm]	Out. Wire [Ømm]	Minimum Breaking Force		Length Mass [kg/m]
		[kN]	[kg]	
7	0.55	0.038	3.841	0.221
8	0.62	0.049	5.071	0.289
9	0.70	0.062	6.349	0.365
10	0.78	0.077	7.839	0.451
11	0.86	0.093	9.485	0.546
12	0.94	0.111	11.288	0.649
13	1.01	0.130	13.247	0.762
14	1.09	0.151	15.364	0.884
15	1.17	0.173	17.637	1.015
16	1.25	0.197	20.067	1.155
18	1.40	0.249	25.397	1.461
19	1.48	0.277	28.297	1.628
20	1.56	0.307	31.354	1.804
22	1.72	0.372	37.939	2.183
24	1.87	0.443	45.150	2.598
25	1.95	0.480	48.991	2.819
26	2.03	0.520	52.989	3.049
28	2.12	0.630	61.455	3.536
30	2.34	0.692	70.547	4.059