



6x19 fibre core is very popular in diameters from 3mm to 16mm and is used on a variety of applications. This rope is very flexible in diameters 3mm to 6mm and is used for many requirements where wire ropes are running over pulleys.




R.H.O.L

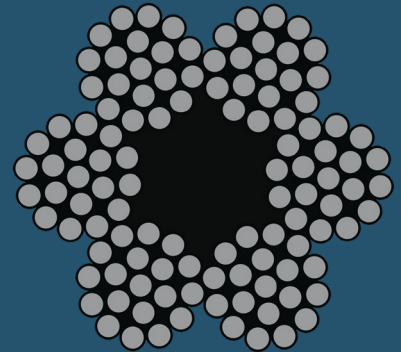

Pulley Suitable



Galvanised



Fibre Core

Breaking Load Table

Nominal Diameter [mm]	Approximate Mass [kg/m]	Minimum breaking loads - 1770 Mpa		Minimum breaking loads - 1960 Mpa	
		[kn]	[kg]	[kn]	[kg]
3	0.031	4.9	498	5.4	552
4	0.055	8.7	886	9.6	982
5	0.087	13.6	1,385	15.0	1,534
6	0.125	19.6	1,995	21.7	2,209
7	0.170	26.6	2,715	29.5	3,007
8	0.221	34.8	3,547	38.5	3,928
9	0.280	44.0	4,489	48.7	4,971
10	0.346	54.3	5,542	60.2	6,137
11	0.419	65.8	6,706	72.8	7,426
12	0.498	78.2	7,981	86.6	8,838
13	0.585	91.8	9,367	101.7	10,372
14	0.678	106.5	10,863	117.9	12,029
16	0.886	139.1	14,189	154.0	15,712
18	1.121	176.1	17,958	195.0	19,885
20	1.384	217.4	22,170	240.7	24,550
22	1.675	263.0	26,826	291.2	29,705
24	1.993	313.0	31,925	346.6	35,352
26	2.339	367.3	37,467	406.8	41,489
30	3.114	489.1	49,883	541.5	55,237
32	3.543	556.4	56,756	616.2	62,848
34	4.000	628.2	64,072	695.6	70,950
36	4.484	704.2	71,831	779.8	79,542
38	4.996	784.7	80,034	868.9	88,626
40	5.536	869.4	88,681	962.8	98,200