



7x19 is very popular in diameters from 3mm to 16mm and is used on a variety of applications. This rope is very flexible in diameters 3mm to 6mm and is used for many requirements where wire ropes are running over pulleys.



R.H.O.L

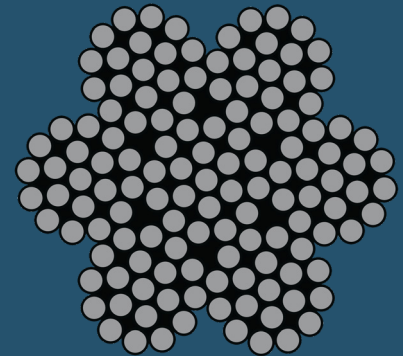

Pulley Suitable



Galvanised

Breaking Loads

Nominal Diameter	Approximate Mass	Minimum Breaking Loads			
		1770 Mpa		1960 Mpa	
[mm]	[kg/m]	[kN]	[Kg]	[kN]	[Kg]
3	0.034	5.77	588	6.39	651
4	0.061	10.25	1045	11.35	1157
5	0.095	16.02	1633	17.74	1808
6	0.137	23.07	2352	25.50	2604
7	0.187	31.40	3202	34.80	3544
8	0.244	41.01	4182	45.40	4629
9	0.309	51.90	5293	57.50	5858
10	0.381	64.07	6535	71.00	7233
11	0.461	77.53	7908	85.90	8751
12	0.549	92.27	9411	102.20	10415
13	0.644	108.29	11045	119.90	12223
14	0.747	125.59	12809	139.10	14176
16	0.975	164.03	16731	181.60	18516
18	1.234	207.60	21175		
20	1.524	256.30	26142		