


Highest reliability of the platform is the main target! This TEUFELBERGER high performance steel wire rope with PLASTFILL® insert for permanent lubrication of the core delivers into high resistance to wear.

MULTILAYER SPOOLING
 SUPERFILL®
 PLASTFILL®

- 6 x K26WS-EPIWRC, RCN 06
- Ordinary lay, right or left lay

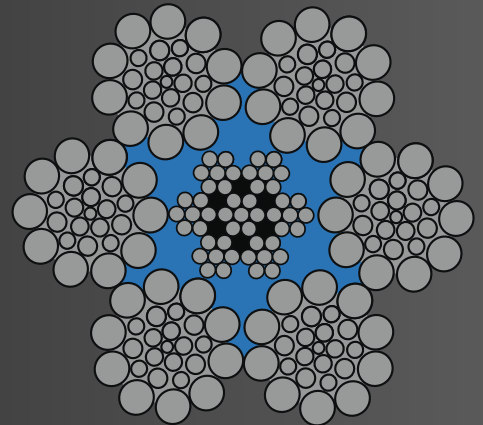

Breaking Load Table

Nominal Diameter		Weight	Minimum Breaking Loads			
			1960 Mpa		2160 Mpa	
[mm]	[inch]	[kg/m]	[kN]	[Kg]	[kN]	[Kg]
34.9	1 3/8	5.00	881	89,837	920	93,814
38.1	1 1/2	5.90	1,048	106,866	1,092	111,761
44.45	1 3/4	8.70	1,426	145,412	1,492	152,142
47.6	1 7/8	9.22	1,636	166,825	1,710	174,371
50.8	2	10.72	1,862	189,871	1,948	198,641