


Good absorption of shock loads, knocks and vibrations due to its especially developed rope construction with the 4-strand core. PLASTFILL® insert provides permanent lubrication of the steel core and results in a extreme long service life.

MULTILAYER SPOOLING
 DUOFILL™
 PLASTFILL®

- 12 – 32mm: 8 x K26WS - EPIWRC (K), RCN 09
- Ordinary lay, right or left lay
- Use without rope swivel

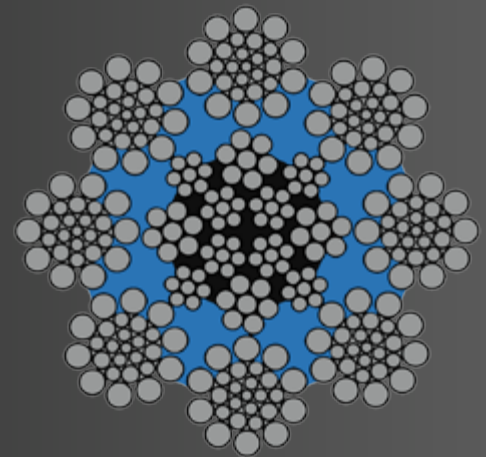

Breaking Load Table

Nominal Diameter [mm]	Weight [kg/m]	Minimum breaking loads - 1770 Mpa		Minimum breaking loads - 1960 Mpa	
		[kN]	[Kg]	[kN]	[Kg]
12	0.62	105	10,707	116	11,829
13	0.73	123	12,543	136	13,868
14	0.82	140	14,276	155	15,806
16	1.09	188	19,171	208	21,210
18	1.35	230	23,453	253	25,799
20	1.68	281	28,654	311	31,713
22	2.00	349	35,588	386	39,361
24	2.41	413	42,114	457	46,601
26	2.82	483	49,252	535	54,555
28	3.28	569	58,022	630	64,242
30	3.67	628	64,038	695	70,870
32	4.39	729	74,337	807	82,291